



Confidea F-CV

Confidea Flushmount Chairman Voting Unit



Description

The Confidea F-CV is Televic's chairman panel for basic discussion systems, with an integrated speaker and electronic voting. Its small form factor, housed in an elegant casing, permits a minimalistic integration into any meeting room furniture. The integrated speaker creates a distributed sound field in the meeting room, increasing intelligibility without the need for an additional room sound system. The panel has a screw-lock connector to fit a removable microphone (available in 30, 40 or 50 cm versions). A 3.5 mm jack socket is available to connect headphones or a hearing loop for the

hearing impaired. The voting systems includes 5 voting buttons and an RFID card reader for identification and authentication. The chairman version has 2 additional buttons compared to the delegate unit: "Next-in-line" and "Priority".

Benefits

The Confidea F-CV is a *sleek and discreet solution* that is perfectly suited to conference rooms without an existing sound system. The ability to connect headphones provides accessibility for the hearing impaired. The range of 5 voting buttons allows for easy and detailed voting options. The

unit is available in a variety of *custom colors, sizes and finishes* to blend in neatly in any environment. The Confidea F-CV is backed by the Plixus® network and redundant cabling to ensure *maximum reliability*. Finally, its shielded microphone is immune to mobile phone interference.

Features

- Basic discussion function
- Electronic voting function
- Tactile microphone push button with integrated LED
- Tactile Next-in-line push button
- Tactile Priority push button
- 5 clear voting buttons with LED indicators: ++/+/0/-/--
- RFID card reader
- Integrated loudspeaker
- Rounded corners for easy installation
- Trademark natural Televic Sound
- Available in custom colors, sizes, finishes

Connectivity

- Screw-lock microphone connector.
Microphones sold separately.

D-MIC30SL	71.98.0053
D-MIC40SL	71.98.0054
D-MIC50SL	71.98.0055

- Two RJ 45 connectors for loop through cabling
- 3.5 mm stereo jack socket for headphones
- Plixus-powered

Software

To fully configure, manage, and use the unit, Televic's CoCon management software is required. The following standard licenses are available:

CoCon Discussion	71.98.1101
CoCon Signage	71.98.1102
CoCon Voting	71.98.1104
CoCon Authentication	71.98.1105

Certifications


Region	Certification
Europe	CE

Specifications


Mechanical	
Material	Steel
Color	Tiger coating Carbon 01
Size (mm)	210 (w) × 80 (h) × 70 (d)
Size (packed)	250 (w) × 120 (h) × 85 (d)
Weight (g)	740 g
Weight packed (g)	860 g
Electrical	
Voltage	48 VDC
Consumption	3.5 W
Speaker Output	
Maximum output power	> 1 W
Frequency response	200-20,000 Hz
Dynamic range	> 90 dB
THD @ nominal level	< 0.1%
Load impedance	8 Ω
Headphone Output	
Maximum output	> 10 mW
Frequency response	22-22,000 Hz
Dynamic range	> 90 dB
THD @ nominal level	< 0.1%
Load impedance	16-32 Ω
Microphone Input	
Dynamic range	> 90 dB
Frequency response	20-20,000 Hz
THD @ nominal level	0.1%

Diagrams

Front View (in mm)

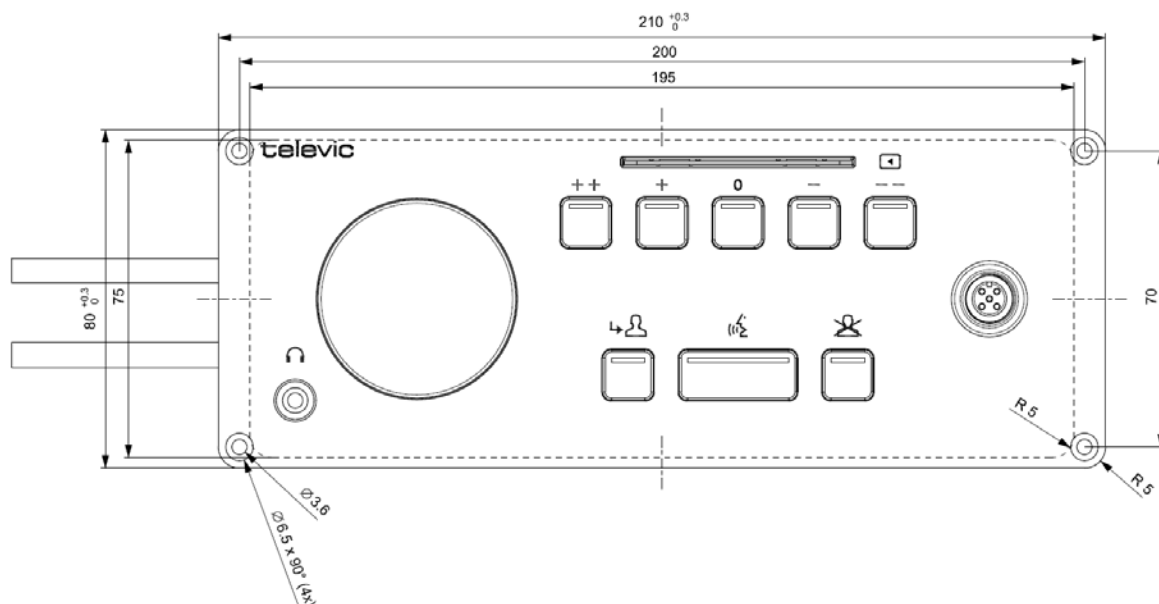

Side View (in mm)

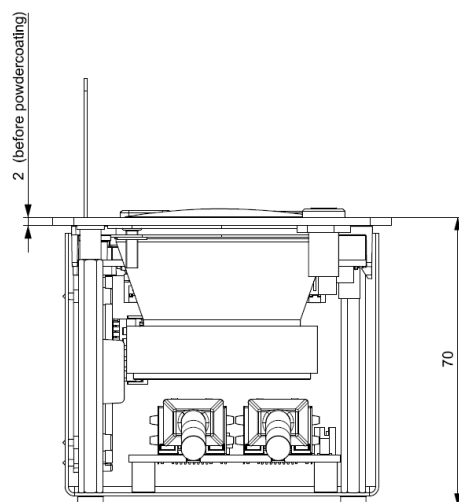

All information copyright **Televic Conference**, 2015.
Version 1.0, October 2015

—
Leo Bekaertlaan 1 · 8870 Izegem · Belgium
Tel. +32 51 30 30 45
Fax +32 51 31 06 70
E-mail: conference@televic.com
Web: <http://www.televic-conference.com>

Televic reserves the right to change this document without notice.